
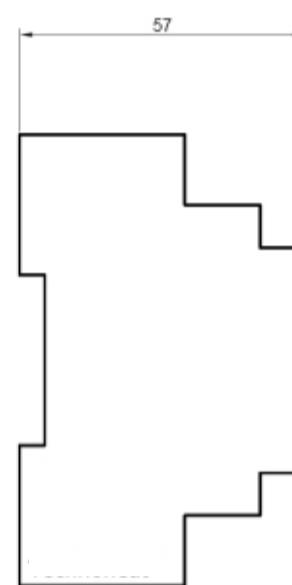


Warmes Haus

1. AC 220 V

BRT-N.

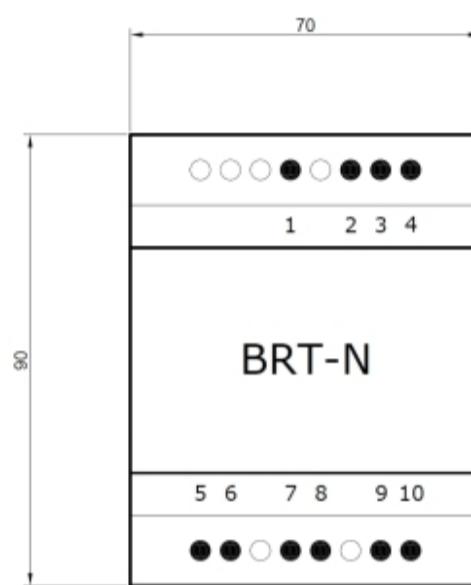

BRT-N,
AC 220 V +/- 10%.

(80%)

(60%).

(100%),

BRT-N.

BRT-N


DIN-

BRT-N

AC 220 V +/- 10%

-
1. : 90 70 59 ;
 2. : DIN- ;
 3. : AC 220 V +/- 10%;
 4. : 100 (10);
 5. : AC 220 V +/- 10%.
-


- 1 – N;
- 2 – 100%
- 3 – 80%
- 4 – 60%
- 5, 6 – , , 1;
- 7, 8 – , , 2;
- 9, 10 – AC 220 V +/- 10%.

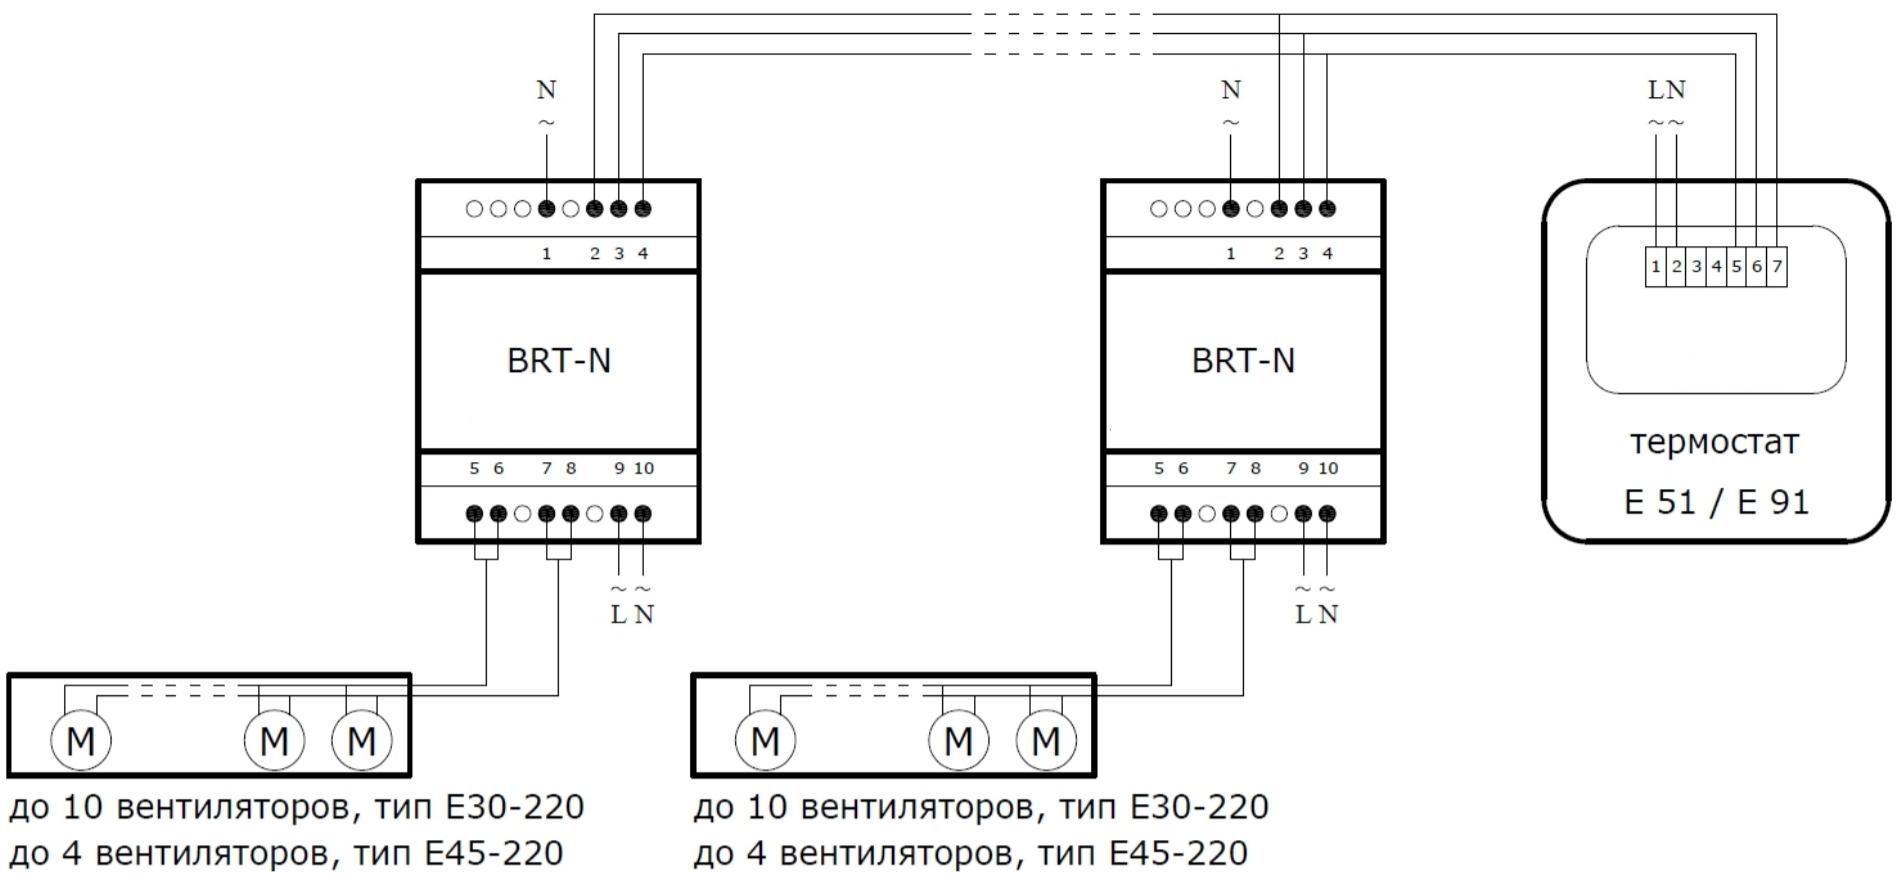

2. AC 12 V

BRT-N 12 V -

12 V,

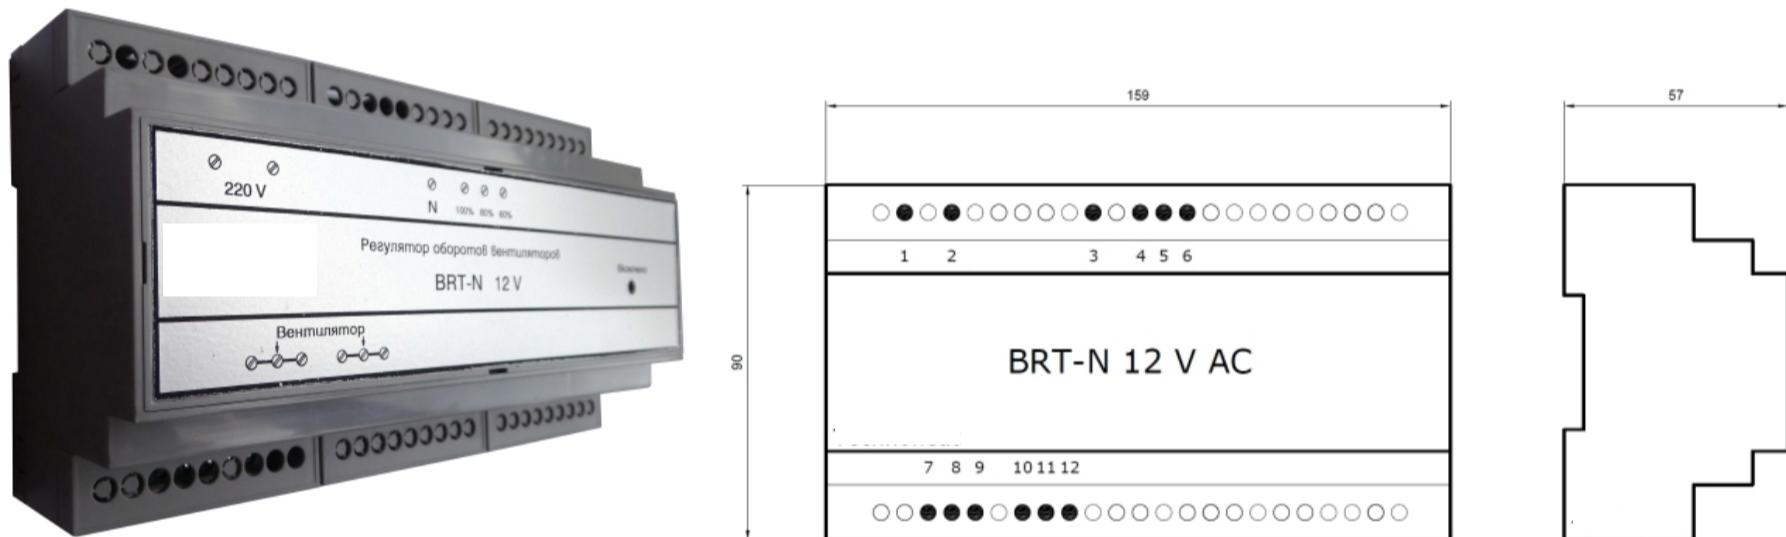

(80%)

(60%).

(100%),

BRT-N 12 V.

BRT-N 12 V


DIN-

BRT-N 12 V

AC 220 V +/- 10%

1. : 90 159 57 ;
2. : DIN- ;
3. : AC 220 V +/- 10%;
4. : 100 (10);
5. : AC 6-9-12 V.

- 1, 2 – AC 220 V +/- 10%;
- 3 – N;
- 4 – 100% , ;
- 5 – 80% , ;
- 6 – 60% , ;
- 7, 8, 9 – , 1; ;
- 10, 11, 12 – , 2.

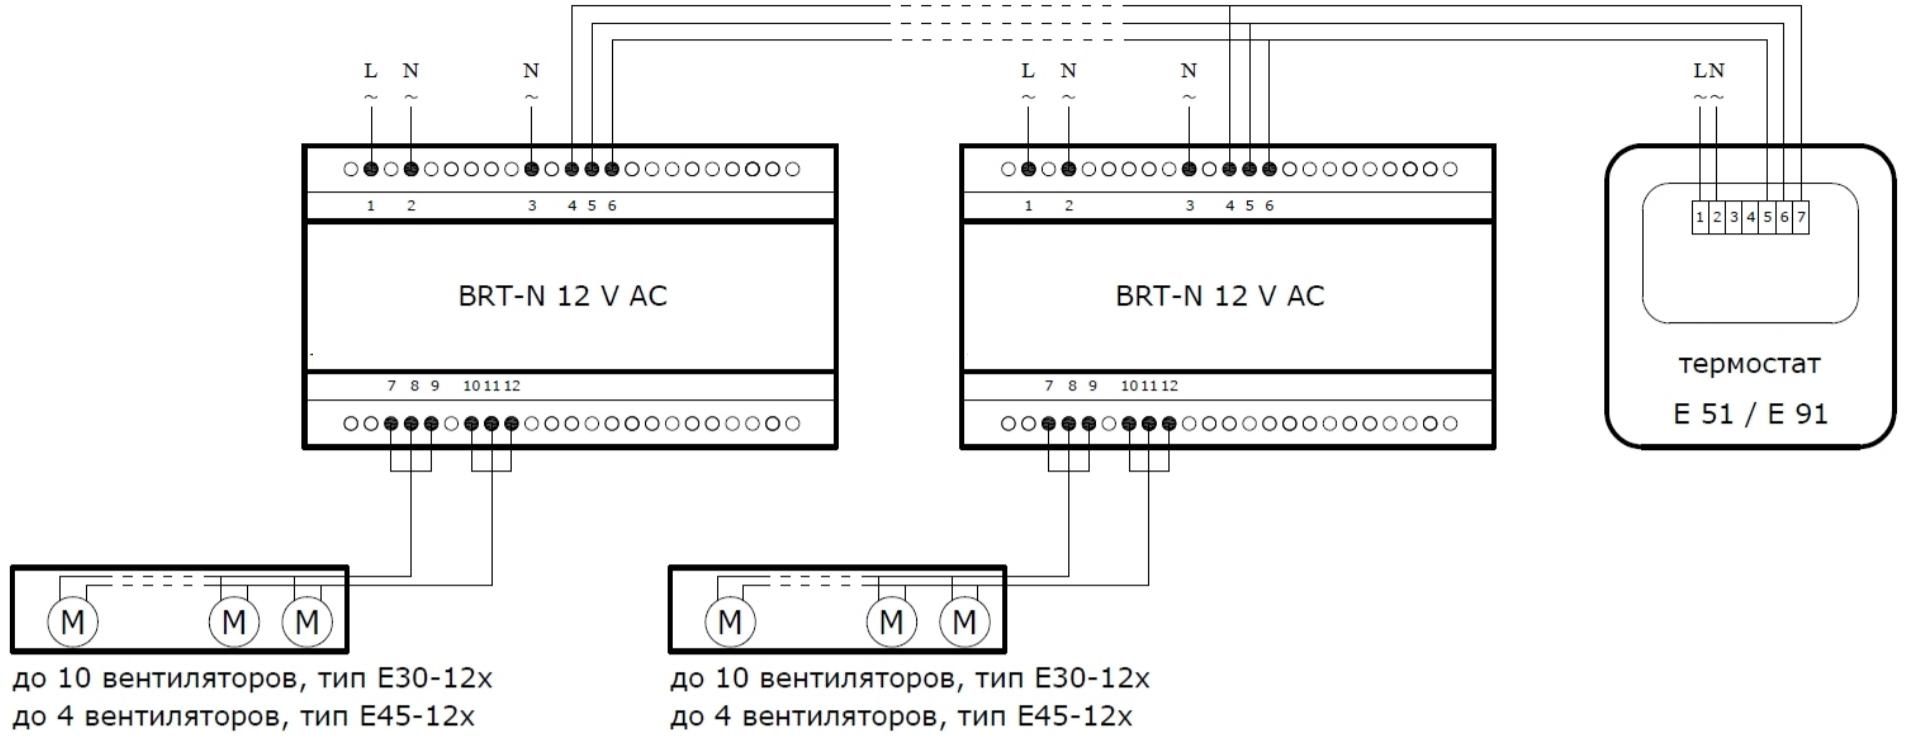


3. DC 12 V

BRT-N 12 V DC -

D 12 V,

1 – 10 V.

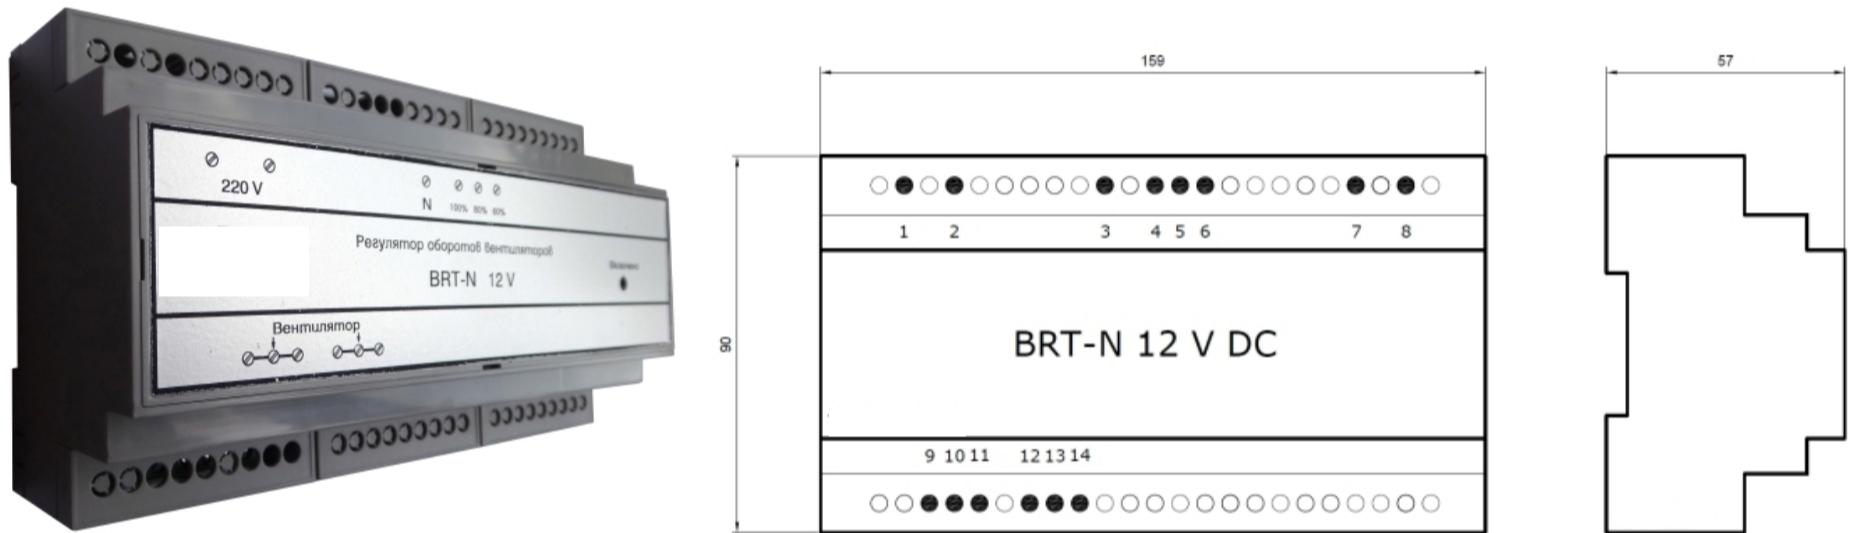

BRT-N 12 V DC,


DIN-

BRT-N 12 V DC

AC 220 V +/- 10%

-
1. : 90 159 57 ;
 2. : DIN- ;
 3. : AC 220 V +/- 10%;
 4. : 60 (20);
 5. DC (60%, 80%, 100%), (5,0 - 6,5 – 8) V;
-

- 1, 2 – AC 220 V +/- 10%;
- 3 – N;
- 4 – 100% , ;
- 5 – 80% , ;
- 6 – 60% , ;
- 7, 8 – 1 – 10 V; , 1 () ;
- 9, 10, 11 – , 2 ().
- 12, 13, 14 –

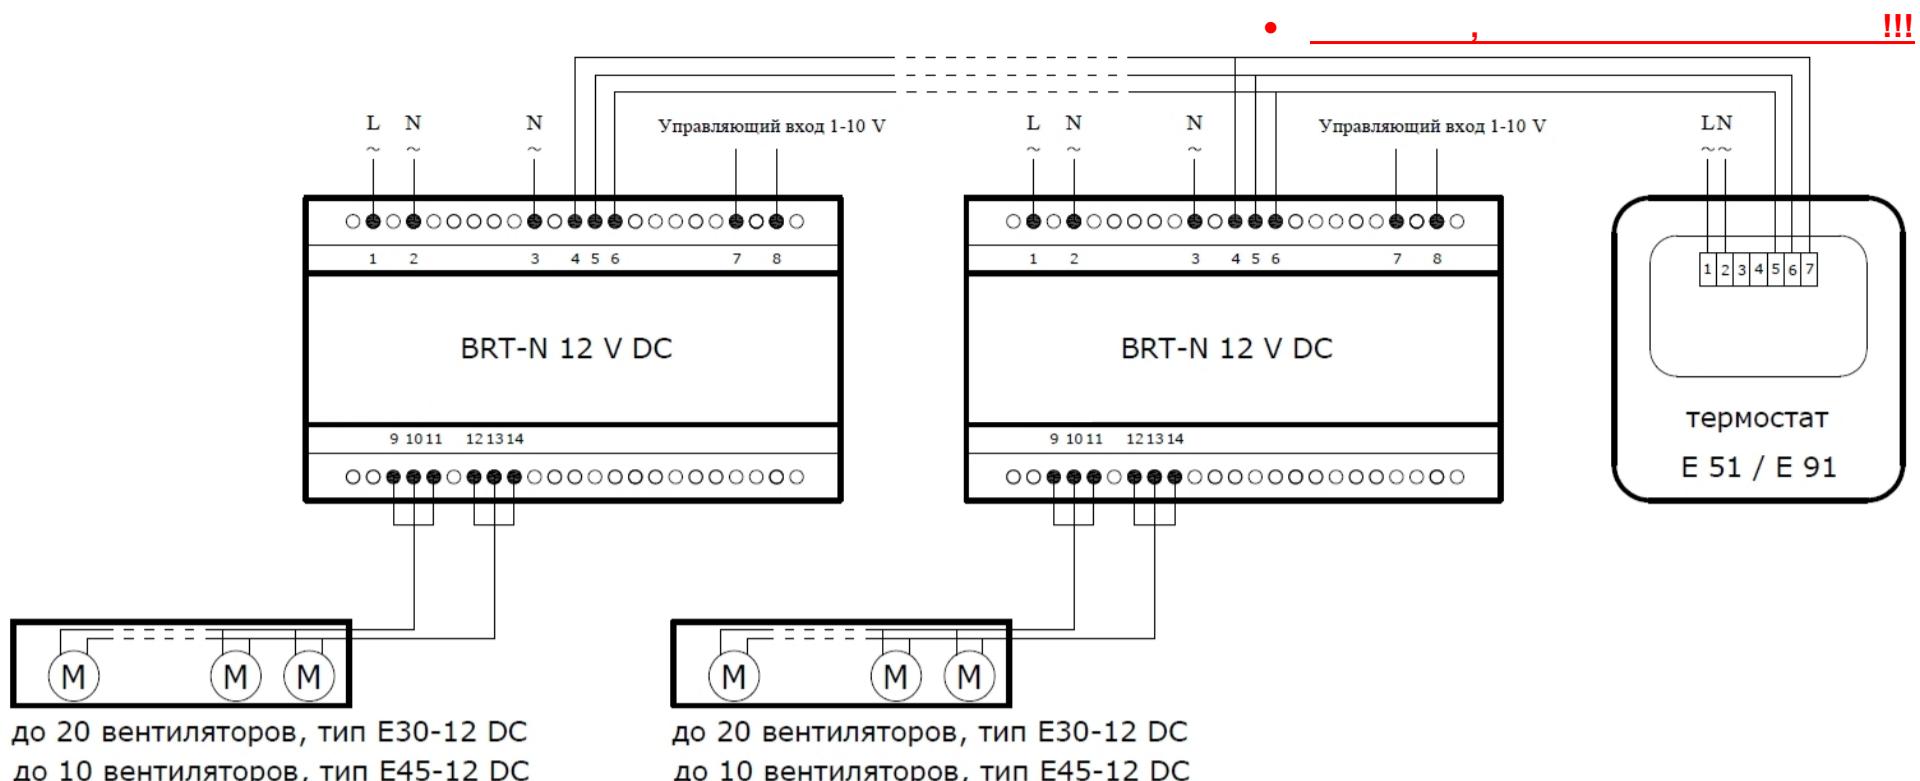

4. _____


, 3-



E 51




E 91

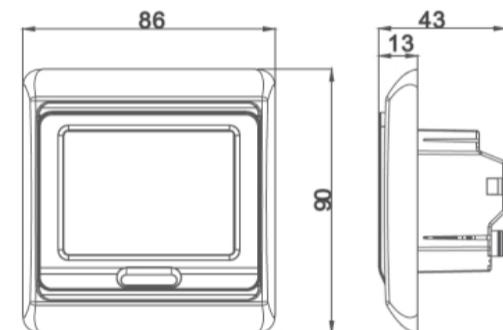

E51 / E91:

1. : AC 220 V +/- 10%;
2. : 2 W;
3. : + 5° / + 45° ;
4. : +/- 1° , ;
5. : IP 20;
6. : PC;
7. : 90 86 43;
8. :

Комнатный термостат

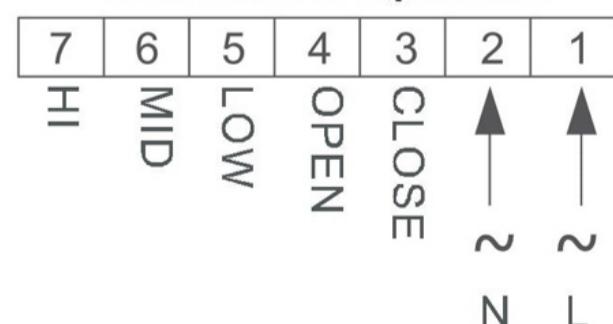

- 1,2 – AC 220 V +/- 10%;
- 3 – (L)
- 4 – (L)
- 5 – 60%
- 6 – 80%
- 7 – 100%